

Product Image



Flip Toggle®


The Flip Toggle® anchors strong toggling mechanism provides heavy duty holding power in drywall, plaster or hollow concrete blocks. Its main feature is its ability to be installed in thick hollow wall material. Its simple and effective tilting mechanism ensures a trouble-free installation every time and is twice as strong as the regular toggle bolts of the same bolt diameter, providing labor savings on every job site. It is available in both 3/16" and 1/4" diameter and only requires a 1/2" hole. The innovative design even provides end users the ability to remove the mounted fixture for repair and/or maintenance and reinstall without the necessity of a new hole location.

General Applications & Uses:

- Drywall
- Wood
- Hollow Block
- Tiled Wall
- Plaster Wall with Wood Matrix

Features and Benefits:

- Ideal for all types of hollow wall, up to 2-1/8" thick
- Requires a 1/2" hole
- Fast and easy installation
- New one strap design for easier insertion and flipping operation
- Superior holding power
- Multi Drive - Slot/Phillips/Screws
- Can be used for ceilings

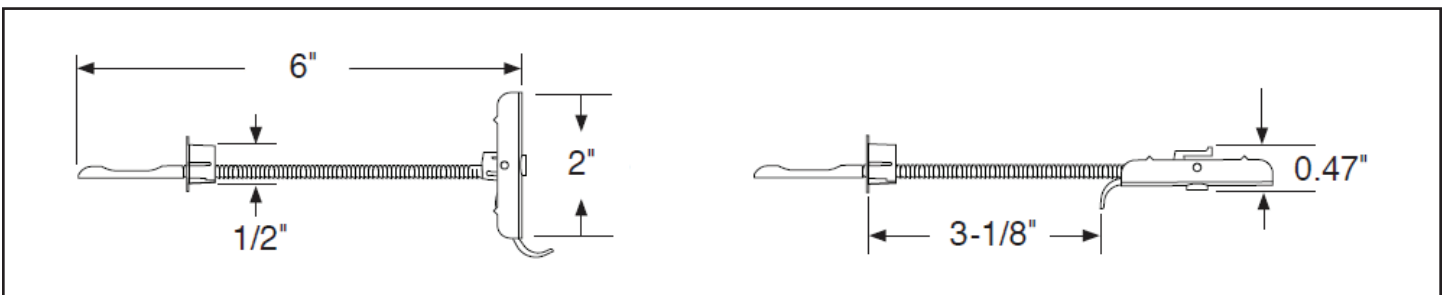

ULTIMATE / SAFE WORKING LOADS 2:1

Anchor Size	Bolt Size	Drywall 1/2"		Drywall 5/8"		Hollow Concrete Block	
		Safe Tension lb.	Safe Shear lb.	Safe Tension lb.	Safe Shear lb.	Safe Tension lb.	Safe Shear lb.
3/16"	10-24 x 2-1/2"	67 lb	106 lb	107 lb	188 lb	415 lb	435 lb
1/4"	1/4"-20 x 2-1/2"	74 lb	137 lb	120 lb	209 lb	535 lb	600 lb

2:1 Loads may vary according to the quality of the drywall or concrete hollow block.