

## Product Image




## Malleable Beam Clamps

Malleable beam clamps are secured to the outside of an I-beam, girder, or other structural member to provide a mounting base for conduit hangers or threaded rod.

Features:

- High strength malleable iron
- Case hardened steel bolt
- Tapped threads back & bottom
- Zinc plated to protect against corrosion
- For use in wet locations

## Dimensional Data

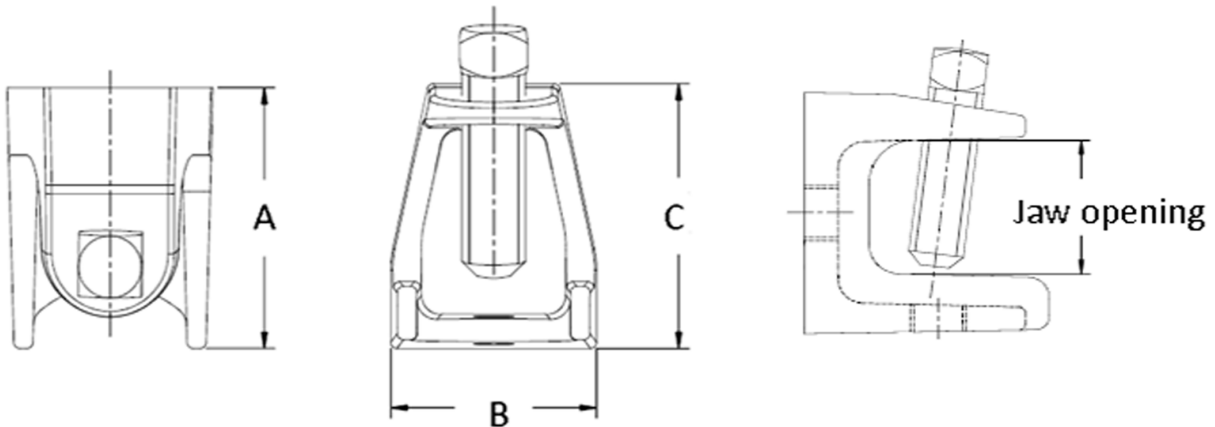

PN#	Threaded Hole Size	Bolt Size	Jaw Opening	Beam Thickness	Dimension 'A' (inches)	Dimension 'B' (inches)	Dimension 'C' (inches)
BK14M	1/4"-20	5/16"-18	0.76	1/8 - 1/2	1.37	1.12	1.36
BK38M	3/8"-16	3/8"-16	0.81	1/8 - 1/2	1.94	2.00	1.75
BK50M	1/2"-13	3/8"-16	1.13	1/2 - 3/4	2.50	2.50	2.13

## Performance Data

PN#	UL Load Rating	Maximum Load Rating
BK14M	40 lbs	120 lbs
BK38M	100 lbs	300 lbs
BK50M	200 lbs	600 lbs