

Product Image




Cable Tie Mounting Base

Nylon mounting bases are a self adhesive, anchoring point for cable ties that helps to secure wires and cables in place.

Installation Instructions:

1. Prep surface for adhesion, ensuring that the surface to which the tape is to be applied is clean, dry and free of any grease or oil.
2. Securely adhere mounting base to clean surface.
3. Allow mounting base to set for the full recommended dwell time.

Dimensional Data

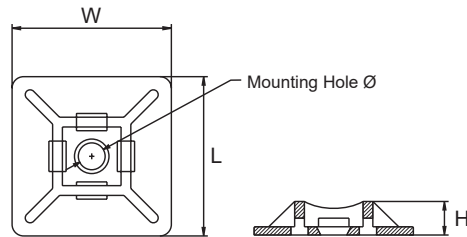

PN#	Length (L)	Width (W)	Height (H)	Mounting Hole \varnothing	Max. Tie Width
DT75S	19.0mm (0.75")	19.0mm (0.75")	4.4mm (0.17")	3.5mm (0.14")	4.0mm (0.16")
DT75SB	19.0mm (0.75")	19.0mm (0.75")	4.4mm (0.17")	3.5mm (0.14")	4.0mm (0.16")
DT100S	27.8mm (1.09")	27.8mm (1.09")	5.7mm (0.22")	5.7mm (0.21")	5.3mm (0.22")
DT100SB	27.8mm (1.09")	27.8mm (1.09")	5.7mm (0.22")	5.7mm (0.21")	5.3 (0.22")

Performance Data

Material	Application Temperature Range	General Service Temperature Range	Dwell Time		Surface Applications
			Min. Bonding	Max. Adhesion	
Rubber Base	65°F to 120°	0°F to 150°	15 minutes	1 hour	Stainless steel, ABS, PVC, Nylon, Aluminum, Alkyd Enamel, Galvanized steel
Acrylic Base	65°F to 120°	-20°F to 180°	48 hours	72 hours	Stainless steel, ABS, PVC, Nylon, Aluminum, Enamel painted steel
Sticky Adhesive	65°F to 115°	0°F to 135°	10 minutes	–	Stainless steel, ABS, PVC, Nylon, Aluminum

*Rubber base and acrylic tape only! The mount and tape together are UL certified for indoor use at a maximum temperature rating of 70°F