


# Hex Lag Screw



| THREAD DATA  |   |  |
|--|---|--|
| Size: 1/4  | Threads per in.: 10   | Thread Class or Type: Lag                    |
| Major Diameter: 0.260 - 0.237  | Minor Dia Max/Min.: 0.177 - 0.160                             | Standard: ASME B18.2.1-2012                  |
| Length: 1-1/4  | Length Tolerance: $\pm 0.12$                                  |  |
| DIMENSIONAL DATA   |   |  |
| Type: Hex Lag Screw  | Standard: ASME B18.2.1-2012                                   | Nominal Diameter: 0.25                       |
| E - Body Diameter : 0.260 - 0.237                                    | F - Width Across Flats: 0.438 - 0.425                         | G - Width Across Corners: 0.505 - 0.484      |
| R - Fillet Radius: 0.030 - 0.010                                     | H - Head Height: 0.188 - 0.150                                | Point Type: Gimlet                           |
| PHYSICAL REQUIREMENTS  |   |  |
| Nominal: 0.25  | Standard: ASTM A307-2014                                      | Typical Materials: carbon steel: 1006 - 1022 |
| Hardness: HRB 69 - 100   | Tensile Load, Min. (lbf): 1533 ref. (min. minor dia X 60 ksi) | Calculated Shear Load-BODY (ref.)(lbf): 920  |
| Calculated Shear Load-THREADS (ref.)(lbf): 766                       | Straightness Factor: N/A                                      |  |
| FINISH DATA  |   |  |
| Finish: Zinc & Clear, non-hexavalent/Cr(VI) free - .0001"/ 3 $\mu$ m | K factor (ref. DIN 946): 0.22                                 | Standard: ASTM F1941/F1941M-2016, Fe/Zn 3AN  |

<sup>1</sup> These torque values are based on K factors determined using DIN 946, tightening tension of 75% of the yield strength, and the calculation formula  $T=KDP$ . These values are advisory only. The torque for assembling critical joints should be determined and/or verified through actual experimentation by the user. The IFI is not responsible for any losses or claims resulting from the use of these values.<sup>2</sup> Calculated Pretension is equal to 75% of the bolt's yield strength achieved when using the indicated Tightening Torque.

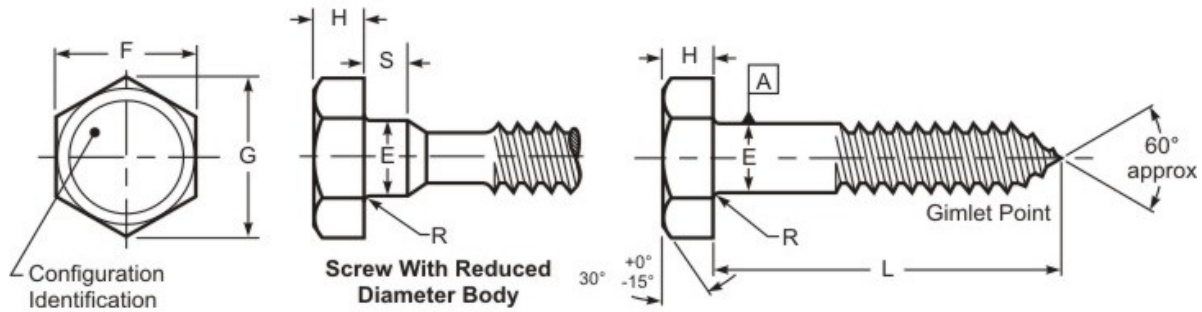