


# Hex Lag Screw



| THREAD DATA  |   |  |
|--|---|--|
| Size: 3/8  | Threads per in.: 7  | Thread Class or Type: Lag                    |
| Major Diameter: 0.388 - 0.360  | Minor Dia Max/Min.: 0.268 - 0.250                             | Standard: ASME B18.2.1-2012                  |
| DIMENSIONAL DATA   |   |  |
| Type: Hex Lag Screw  | Standard: ASME B18.2.1-2012                                   | Nominal Diameter: 0.375                      |
| E - Body Diameter : 0.388 - 0.360                                    | F - Width Across Flats: 0.562 - 0.544                         | G - Width Across Corners: 0.650 - 0.620      |
| R - Fillet Radius: 0.030 - 0.010                                     | H - Head Height: 0.268 - 0.226                                | LT (Reference Thread Length): .5L+.5"        |
| Point Type: Gimlet   | L - Length: 6   | Length Tolerance: $\pm 0.12$                 |
| PHYSICAL REQUIREMENTS  |   |  |
| Nominal: 0.375   | Standard: ASTM A307-2014                                      | Typical Materials: carbon steel: 1006 - 1022 |
| Hardness: HRB 69 - 100   | Tensile Load, Min. (lbf): 3596 ref. (min. minor dia X 60 ksi) | Calculated Shear Load-BODY (ref.)(lbf): 2158 |
| Calculated Shear Load-THREADS (ref.)(lbf): 1798                      | Straightness Factor: 0.036                                    |  |
| FINISH DATA  |   |  |
| Finish: Zinc & Clear, non-hexavalent/Cr(VI) free - .0001"/ 3 $\mu$ m | K factor (ref. DIN 946): 0.22                                 | Standard: ASTM F1941/F1941M-2016, Fe/Zn 3AN  |

<sup>1</sup> These torque values are based on K factors determined using DIN 946, tightening tension of 75% of the yield strength, and the calculation formula  $T = KDP$ . These values are advisory only. The torque for assembling critical joints should be determined and/or verified through actual experimentation by the user. The IFI is not responsible for any losses or claims resulting from the use of these values. <sup>2</sup> Calculated Pretension is equal to 75% of the bolt's yield strength achieved when using the indicated Tightening Torque.

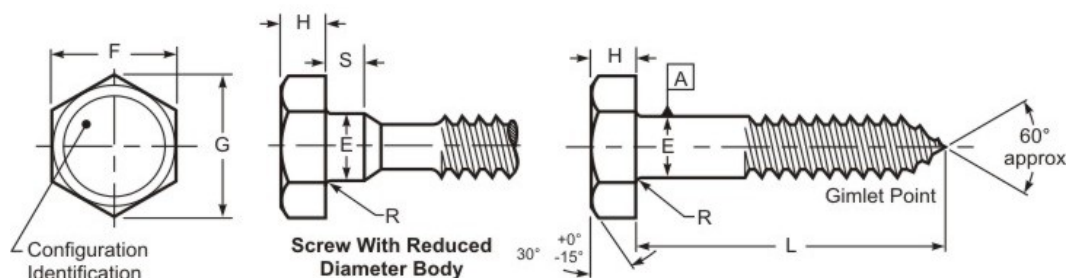