
## $80^{\circ}/82^{\circ}$ - Flat Head - Type I (Phillips) - Wood Screw



THREAD DATA		
<b>Size:</b> #10	Threads per in.: 13	Series Designation: Single-Lead
Thread Class or Type: WSSL	<b>Major Diameter:</b> 0.194 - 0.183	Minor Dia Max/Min.: 0.123 Max.
<b>Standard:</b> ASME B18.6.1-2016		
DIMENSIONAL DATA		
Type: 80°/82° - Flat Head - Type I (Phillips) - Wood Screw	<b>Standard:</b> ASME B18.6.1 - 2016	Nominal Diameter: 0.19
<b>E - Body Diameter</b> : 0.157 - 0.146	<b>A - Head Diameter:</b> 0.385 - 0.340	H - Head Height: 0.116 Ref.
Point Type: Gimlet (sharp)	Driver Size: #3	Penetration Depth: 0.129 - 0.106
M - Ref. Recess Dim.: 0.258	L - Length: 2	Length Tolerance: -0.06
PHYSICAL REQUIREMENTS		
Nominal: 0.19	Standard: ASME B18.6.1-2016, Brass	Typical Materials: Brass (7030)
Straightness Factor: 0.012		
FINISH DATA		
Finish: As received steel	K factor (ref. DIN 946): 0.2	

 $<sup>^2 \ \</sup>text{Calculated Pretension is equal to 75\% of the bolt's yield strength achieved when using the indicated Tightening Torque.}$ 



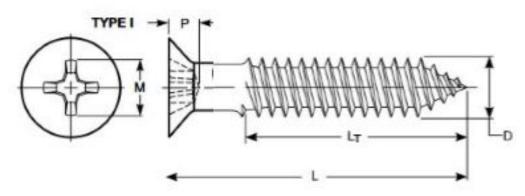