


80°/82° - Flat Head - Type I (Phillips) - Wood Screw



THREAD DATA		
Size: #10	Threads per in.: 13	Series Designation: Single-Lead
Thread Class or Type: WSSL	Major Diameter: 0.194 - 0.183	Minor Dia Max/Min.: 0.123 Max.
Standard: ASME B18.6.1-2008	Length: 2-1/2	Length Tolerance: -0.06
DIMENSIONAL DATA		
Type: 80°/82° - Flat Head - Type I (Phillips) - Wood Screw	Standard: ASME B18.6.1 - 2008	Nominal Diameter: 0.19
E - Body Diameter : 0.157 - 0.146	A - Head Diameter: 0.385 - 0.340	H - Head Height: 0.116 Ref.
Point Type: Gimlet (sharp)	Driver Size: #3	Penetration Depth: 0.129 - 0.106
M - Ref. Recess Dim.: 0.258	LG max./LB min.: 2/3 Screw Length	
PHYSICAL REQUIREMENTS		
Nominal: 0.19	Standard: ASME B18.6.1 - Brass	Typical Materials: Brass
Straightness Factor: 0.015		
FINISH DATA		
Finish: As received steel (RoHS Compliant)	K factor (ref. DIN 946): 0.18	

¹ These torque values are based on K factors determined using DIN 946, tightening tension of 75% of the yield strength, and the calculation formula $T=KDP$. These values are advisory only. The torque for assembling critical joints should be determined and/or verified through actual experimentation by the user. The IFI is not responsible for any losses or claims resulting from the use of these values. ² Calculated Pretension is equal to 75% of the bolt's yield strength achieved when using the indicated Tightening Torque.

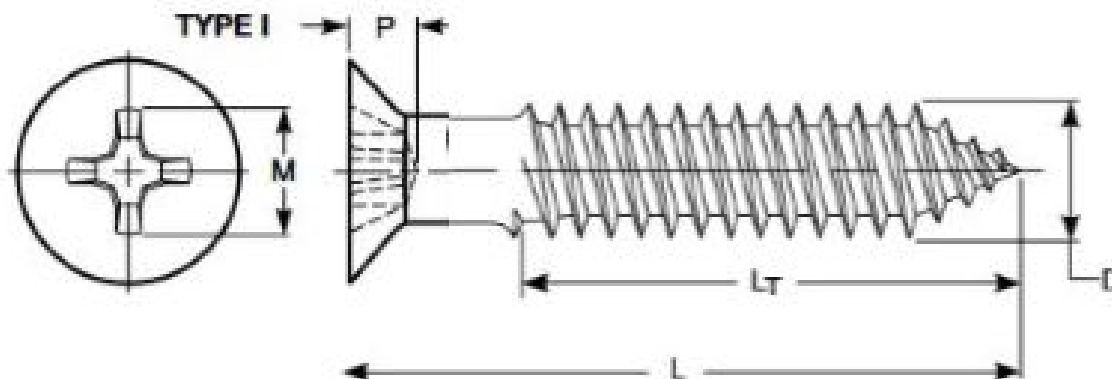