


Threaded Rod (3/4 and smaller)



THREAD DATA		
Size: 3/4	Threads per in.: 10	Series Designation: UNC
Thread Class or Type: 1A	Major Diameter: 0.7482 - 0.7288	Pitch and Functional Dia.: 0.6832 - 0.6744
Tensile Stress Area: 0.3345	Standard: ASME B1.1 - 2003 (R2008)	
DIMENSIONAL DATA		
Group: Threaded Rod-Inch	Type: Threaded Rod (3/4 and smaller)	Standard: ASME B18.31.3 - 2014
Size: 3/4	TPI: 10	Nominal: 0.75
Ends: Sheared	L - Length: 12 foot	Length Tolerance: +/- 1/2
PHYSICAL REQUIREMENTS		
Nominal: 0.75	Standard: ASTM A307A-2014	Typical Materials: low carbon steel, 1006 through 1022
Hardness: HRB 69 - 100	Tensile Load, Min. (lbf): 20,040	Yield PSI, 2% Offset, Machined Specimen: 36,000
Elongation, min. %, Machined Specimen: 18	Tensile Strength, Min. (psi): 60,000	Calculated Shear Load-THREADS (ref.)(lbf): 10,020
Tightening Torque ¹: 124 ft.lbf, 1,490 in.lbf, 168.4 Nm		
FINISH DATA		
Finish: Zinc & Clear, non-hexavalent/Cr(VI) free - .0001"/ 3µm	K factor (ref. DIN 946): 0.22	Standard: ASTM F1941/F1941M-2016, Fe/Zn 3AN

¹ These torque values are based on K factors determined using DIN 946, tightening tension of 75% of the yield strength, and the calculation formula T=KDP. These values are advisory only. The torque for assembling critical joints should be determined and/or verified through actual experimentation by the user. The IFI is not responsible for any losses or claims resulting from the use of these values.

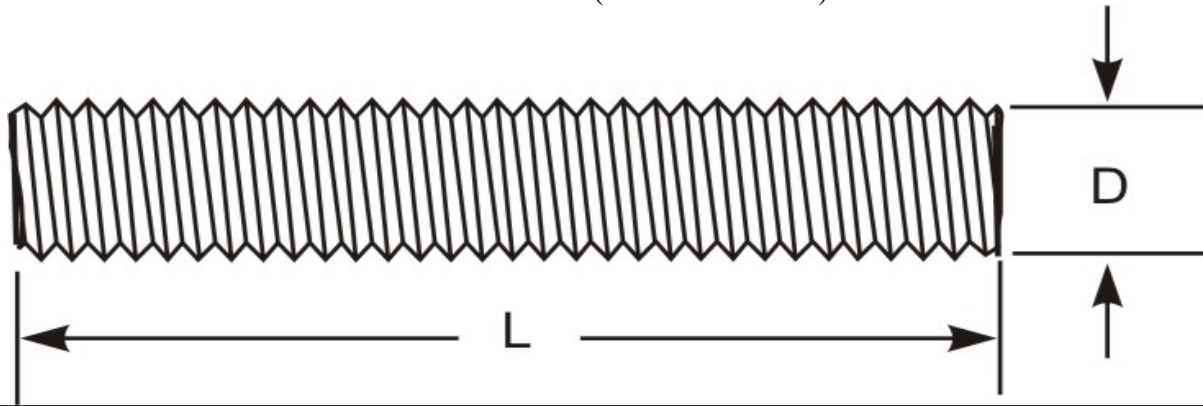