



# Truss Head - Slt'd

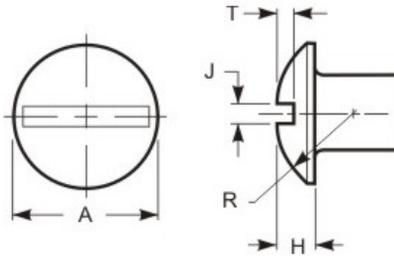


## GRADE MARK

THREAD DATA		
Size: 1/4	Threads per in.: 20	Series Designation: UNC
Thread Class or Type: 2A	Major Diameter: 0.2489 - 0.2408	Pitch and Functional Dia.: 0.2164 - 0.2127
Tensile Stress Area: 0.0318	Standard: ASME B1.1 - 2003 (R2008)	
DIMENSIONAL DATA		
Type: Truss Head - Slt'd	Standard: ASME B18.6.3 - 2013	Nominal Diameter: 0.25
A - Head Diameter: 0.573 - 0.546	H - Head Height: 0.150 - 0.133	J - Slot Width: 0.075 - 0.064
T - Slot Depth: 0.087 - 0.070	L - Length: 1	Length Tolerance: -0.03
PHYSICAL REQUIREMENTS		
Nominal: 0.25	Standard: ASME B18.6.3-2013, Machine Screw (carbon steel)	Typical Materials: low carbon steel, 1010 through 1022
Hardness: HRB 100 - 70	Tensile Load, Min. (lbf): 1,908	Yield PSI, 2% Offset, Machined Specimen: 36,000
Tensile Strength, Min. (psi): 60,000	Calculated Shear Load-BODY (ref.)(lbf): 1,145	Calculated Shear Load-THREADS (ref.)(lbf): 954
Straightness Factor: N/A	Calculated Pretension <sup>2</sup> (lbf) : 859	Tightening Torque <sup>1</sup> : 4 ft.lbf, 47 in.lbf, 5.3 Nm
FINISH DATA		
Finish: Zinc & Clear, non-hexavalent/Cr(VI) free - .0001"/ 3µm	K factor (ref. DIN 946): 0.22	Standard: ASTM F1941/F1941M-2016, Fe/Zn 3AN

<sup>1</sup> These torque values are based on K factors determined using DIN 946, tightening tension of 75% of the yield strength, and the calculation formula T=KDP. These values are advisory only. The torque for assembling critical joints should be determined and/or verified through actual experimentation by the user. The IFI is not responsible for any losses or claims resulting from the use of these values.<sup>2</sup> Calculated Pretension is equal to 75% of the bolt's yield strength achieved when using the indicated Tightening Torque.



# Hex

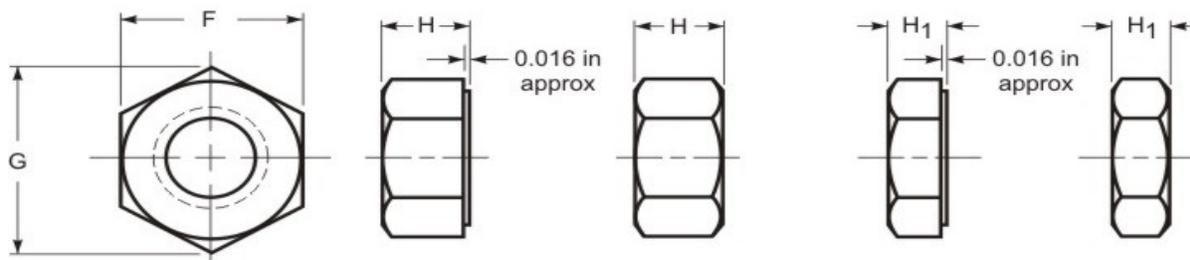

## NO MARK

### GRADE MARK

THREAD DATA		
Size: 1/4	Threads per in.: 20	Series Designation: UNC
Thread Class or Type: 2B	Pitch and Functional Dia.: 0.2224 - 0.2175	Minor Dia Max/Min.: 0.2070 - 0.1960
Tensile Stress Area: 0.0318	Standard: ASME B1.1 - 2003 (R2008)	
DIMENSIONAL DATA		
FILTER - Thread Class or Type: 2B	Type: Hex	Standard: ASME B18.2.2-2015
Size: 1/4	Nominal: 0.25	F - Width Across Flats: 0.438 - 0.428
G - Width Across Corners: 0.505 - 0.488	H - Thickness: 0.226 - 0.212	Runout of Bearing Surface, FIM Proof Stress Up to 150,000 psi: 0.015 Max
Runout of Bearing Surface Proof Stress 150,000 psi and Greater: 0.010 Max		
PHYSICAL REQUIREMENTS		
Nominal: 0.25	Type: Hex	Grade: Grade 2, SAE J995-2017
Typical Material: carbon steel	Hardness: HRC 32 max.	Proof Stress, psi.: 90,000
Proof Load, lbs.: 2,862		
FINISH DATA		
Finish: Zinc & Clear, non-hexavalent/Cr(VI) free - .0001"/ 3µm	K factor (ref. DIN 946): 0.22	Standard: ASTM F1941/F1941M-2016, Fe/Zn 3AN

