
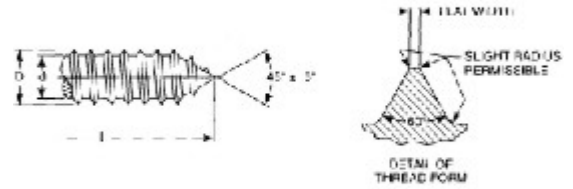


Pan Head - Type I (Phillips) Combination Sltd - A, AB

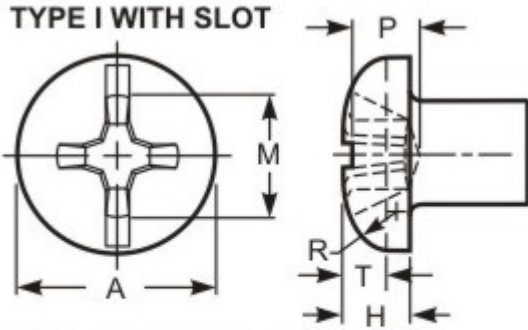

This type of recess has a large center opening, tapered wings, and blunt bottom, with all edges relieved or rounded. A slot runs parallel to one pair of recess wings.

THREAD DATA		
Size: #6	Threads per in.: 20	Thread Class or Type: AB
Major Diameter: 0.1390 - 0.1320	Minor Dia Max/Min.: 0.104 - 0.099	Standard: ASME B18.6.3-2013
DIMENSIONAL DATA		
Type: Pan Head - Type I (Phillips) Combination Sltd - A, AB	Standard: ASME B18.6.3 - 2013	Nominal Diameter: 0.138
A - Head Diameter: 0.270 - 0.256	H - Head Height: 0.097 - 0.087	J - Slot Width: 0.048 - 0.039
T - Slot Depth: 0.050 - 0.033	Driver Size: 2	Penetration Depth: 0.080 - 0.055
Wobble: 12°	M - Ref. Recess Dim.: 0.159	L - Length: 1-1/2
Length Tolerance: ± 0.05		
PHYSICAL REQUIREMENTS		
Nominal: 0.138	Standard: ASME B18.6.3-2013, Type AB (carbon steel)	Typical Materials: carbon steel: 1018-1022
Test Plate Thickness in.: 0.0770 - 0.0730	Test Plate Hole Size in.: 0.1160	Torsional Strength, Min. (in.lbf): 24
Core Hardness: HRC 28 - 38	Case Hardness: HRC 45 Min.	Case Depth (in.): .007-.002
Ductility Test Angle: 10°	Straightness Factor: N/A	
FINISH DATA		
Finish: Zinc & Clear, non-hexavalent/Cr(VI) free - .0001"/ 3µm	K factor (ref. DIN 946): 0.22	Standard: ASTM F1941/F1941M-2016, Fe/Zn 3AN

¹ These torque values are based on K factors determined using DIN 946, tightening tension of 75% of the yield strength, and the calculation formula $T=KDP$. These values are advisory only. The torque for assembling critical joints should be determined and/or verified through actual experimentation by the user. The IFI is not responsible for any losses or claims resulting from the use of these values.² Calculated Pretension is equal to 75% of the bolt's yield strength achieved when using the indicated Tightening Torque.

